

PASSENGER ENTRANCES & REPLACEMENT PANELS

THE PEELLE COMPANY 34 E. Main Street, #372, Smithtown, NY 11787

THE PEELLE COMPANY LTD 195 Sandalwood Parkway West, Brampton, ON L7A 1J6 1 800 787 5020 1 905 846 4545 SALES@PEELLEDOOR.COM PEELLEDOOR.COM

Complete Entrance Quote Request



CUSTOMER DATA:	CUSTOMER DATA: Job Name:		
Company:			
Address:	Location:		
	Elevator #: Building:		
Contact Person:	Floors:		
Phone:	_ E-mail:		
Quote Needed By: Estimated Ship Date: Original Manufacturer:			
DOOR TYPE - (1 1/4 in Thick Panels) QUANTITY	HANDING		
SINGLE SPEED CENTER OPENING - 1CO LANDING DOORS TWO SPEED CENTER OPENING - 2CO CAR DOORS SINGLE SPEED SIDE OPENING - 1SO TRAVEL TWO SPEED SIDE OPENING - 2SO TOTAL TRAVEL OPENING WIDTH OPENING HEIGHT			
36 in 54 in 84 in OTHER GAL Si 42 in 60 in 96 in Other 48 in OTHER 108 in (
Image: Construction of the construc			

STANDARD CONSTRUCTION SPECIFICATIONS

- 1) Passenger Entrances are 1-1/2 hour fire rated UL labeled
- 2) Door Panels: 16 Gauge Face Sheet, 16 gauge Back Sheet
- 3) Two Door Guides and one 14 gauge safety retainer per panel
- 4) Standard GAL equipment mounting provisions are included
- 5) Frames: 16 Gauge Sheet with a 2" square profile (bolted, welded, or welded and mitred)
- 6) Fascia: 16 Gauge Sheet with maximum 12 ft floor height maximum (blind fascia for skipped or bypassed floors are non- standard)
- 7) Standard Header and Strut Design: 12 Gauge including Hoistway Material (header, struts, etc.)
- 8) Sill Construction: Aluminum (standard), Nickel Silver, Stainless Steel or Bronze are optional

Replacement Panels Quote Request



Company:		Delivery Date:		
Address:				
Contact Person				
Phone:				
Job Name / Address:				
Job City / State:		Signature:		
QUANTITY () Sets of Landi	ng Doors ()	Sets of Car Doors	APPROVAL DR	AWING REQUIRED?
TWO SPEED CER	4 in Thick Panels) CENTER OPENING - 1C NTER OPENING - 2CO IDE OPENING - 1SO E OPENING - 2SO DE OPENING - 3SO	0		DING eft Right Center
PAINTED (RAL	#4 (SATIN) #4 (SATIN) RIGIDIZED (RIMEX) KENED		NTZ, LIGHT OXIDIZE NTZ, DARK OXIDIZE	
OPENING WIDTH 36 in 42 in 48 in 54 in 60 in C in Opening Width	OPENING HEIGHT B 4 in 96 in 108 in OR in Opening Height	PANEL THICKNESS 1 1/4 in (STD) 1 1/2 in 2 3/4 in 1 in (CAR ONLY) OPERATOR TYPE GAL Standard Other ()	UNLOCKING KEY HOLE	 Door Panel Kit Includes: Nylon Gibs, Safety Retainer, Sight Guard, Escutcheon & Neoprene Astragal for Center Opening Doors 1 1/2 HR UL Labels (landing doors only) where allowed Material Not Included: Access Switch, Braille Plates, Painted/Applied Floor Designations Panel Construction:
in Panel Width	in Panel Height		ONLY REQUIRED FOR CENTER OPENING DOORS	16 GA front sheet & back sheet Reinforced Panel drilled per operator template

Painted Steel



UNLESS NOTED *** STANDARD PAINT FINISH IS GLOSS FOR 100% COLOR VERIFICATION REQUEST A PAINT CHIP

Metals


SIGNAL WHITE






Stainless Steel 304 #4 (satin)

TRAFFIC WHITE



Stainless Steel 316 #4 (satin)



Stainless Steel 5WL (RIGIDIZED)



Stainless Steel Blackened



Stainless Steel 304 #8 (mirror)



Stainless Steel Non Directional Vortex (RIMEX)



(mirror)

97301

Bronze Muntz #8 Bronze Muntz #4



Bronze Muntz #4 Light Oxidize




97304 Bronze Muntz #4 Dark Oxidize



Galvanized

Sill Construction

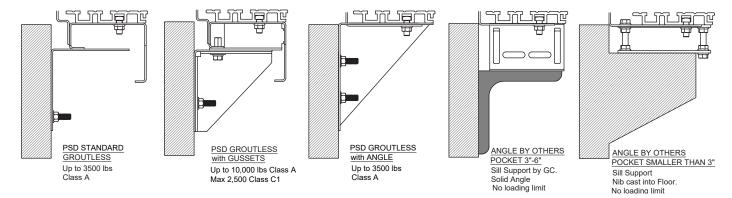

THE PEELLE COMPANY

Phone: 1 800 787 5020

Fax: 1 905 846 2161

sales@peelledoor.com

www.peelledoor.com