


LEGEND		
W	CLEAR OPENING WIDTH	
Н	CLEAR OPENING HEIGHT	
Х	WALL THICKNESS	
В	SPACE REQUIRED	
С	RETURN SPACE	
RO	ROUGH OPENING WIDTH	
ROH	ROUGH OPENING HEIGHT	

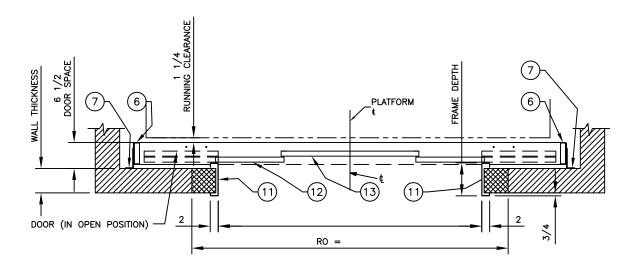

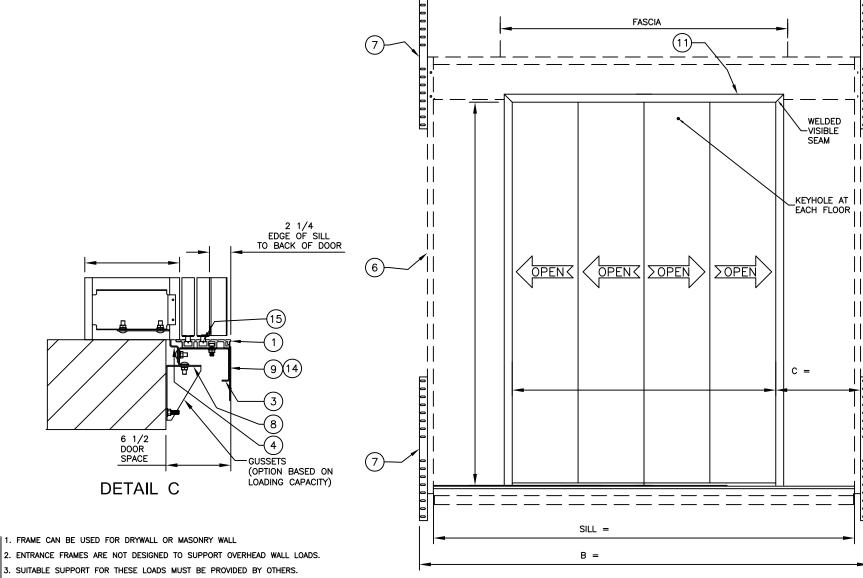

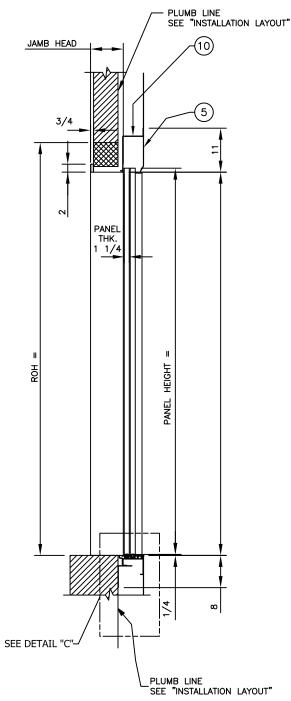

ITEM	BILL OF MATERIALS	MATERIAL	FINISH	QTY
1	SILL EXTRUDED	See Estimate	See Estimate	
2	STRUT KNEE (NOT SHOWN)	12GA	GALV	4
3	SILL SUPPORT	12GA	GALV	1
4	JAMB BRACKET	12GA	GALV	2
5	HANGER COVER	16GA	GALV	1
6	STRUT	12GA	GALV	2
7	TIE ANGLE	12GA	GALV	4
8	GROUT RETAINER	12GA	GALV	1
9	TOE GUARD	16GA	GALV	2
10	HEADER_PSD SO	12GA	GALV	1
11	FRAME	See Estimate	See Estimate	
12	2/SP DOOR ASSEMBLY	See Estimate	See Estimate 2	
13	2/SP DOOR ASSEMBLY	See Estimate	See Estimate	
14	FASCIA STARTER SO	16GA	GALV	1
15	DOOR GIBS	-		8
16	DUST COVER (NOT SHOWN)	16GA	GALV	1
	HARDWARE INSTALL	ATION KIT		
17A	PSD DOOR PANEL HARDWARE (INCLUDING GIBS & RETAINERS)	560028	-	4
17B	PSD ENTRANCE HARDWARE CO	560027	-	1
17C	SIGHT GUARD HARDWARE	560025	-	2
17D	FASCIA HARDWARE	560026	_	1

## **FOR APPROVAL**

560023

560018

PSD ANCHOR HARDWARE

DOOR ASTRAGAL

MATERIAL & FINISH				
OOR FACE FINISH	See Estimate			
OOR BACK FINISH	See Estimate			
FRAME FINISH	See Estimate			
SILL MATERIAL	See Estimate			
OHANTITY RDEAKDOWN				

QO/MITT BRE/MBOWN				
QTY - See Estimate	2CO - W x H			

PSD ENTRANCE 2CO

BUILDING LOCATION APPROVED BY: ELEV. NO: SHEET 1 OF 1 DATE: JOB #:

I. ENTRANCES ARE UL LABELED. 1 1/2 HOUR (MINIMUM) RATING. 5. ENTRANCES ARE PRE-DRILLED FOR GAL EQUPMENT.

6. IT IS RECOMMENDED THAT THE ENTRANCE WALL BE LEFT OPEN UNTIL DOOR FRAMES AND SILLS ARE SET IN PLACE IF THIS IS NOT POSSIBLE THEN A ROUGH OPENING MUST BE PROVIDED THAT IS 2'-O" WIDER AND 6" HIGHER THAN DOOR OPENING. WALL IS TO BE COMPLETED AND SILLS AND FRAMES AS REQUIRED ARE TO BE GROUTED BY OTHERS AFTER ENTRANCES ARE INSTALLED IN PLACE.

[ALL DIMENSIONS IN INCHES]
DRAWING NOT TO SCALE